


**Please read this manual
carefully before use!**

User Manual



Jump starter with air compressor

KS JSP-2000

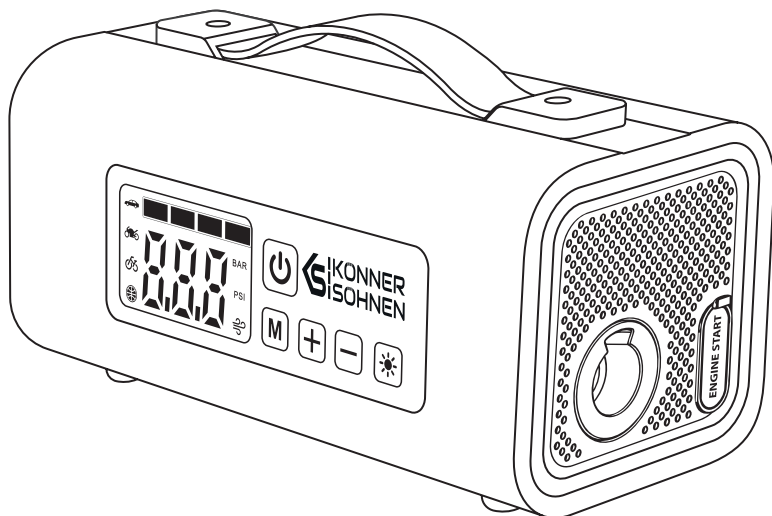



Thank you for choosing **Könnér & Söhnen®** products. This manual provides a brief description of safety requirements, setup procedures, and operating instructions. More information is available in the support section at: **konner-sohnen.com/pages/instructions**

You can also go to the support section and download the manual by scanning the QR code or on the website of the official importer of **Könnér & Söhnen®** at **www.konner-sohnen.com**



Please, read this manual carefully before use!

The manufacturer reserves the right to make changes that may not be reflected in this manual, including:

- The manufacturer reserves the right to make changes in the product design, configuration and construction.
- The images and drawings in this manual are for reference only and may differ from the actual components and inscriptions on the products.

Contact information that you are free to use in case of any problems can be found at the end of this manual. All information in this manual is correct to the best of our knowledge at the time of publication. The current list of service centers can be found on the official importer's website at: **www.konner-sohnen.com**



ATTENTION - DANGER!



Failure to follow the recommendations marked with this sign may lead to serious injury or death of the operator or third parties.



IMPORTANT!



Useful information while operating the machine.

SAFETY INSTRUCTION

1

1. Read the operating instructions carefully before using the device.
2. The device must never be used as a substitute for a car battery.
3. Keep children and animals away from the working area of the device.
4. Only use the jump starter for 12 V batteries.
5. Keep the clips and their connection points clean and tidy. Never connect the clips together.
6. Avoid using the device near explosive substances, flammable gases, or in dusty environments.
7. Avoid overheating the device, smoking near the device, and exposing the device to extreme moisture; keep the device away from open flames and never immerse it in water.
8. The device must not be stored at temperatures exceeding 60 °C.
9. After successfully jump-starting the vehicle, disconnect the jump starter from the battery within 30 seconds to prevent equipment damage.
10. Do not use the jump starter cable to charge other devices.
11. Keep it supervised while charging.
12. Using the device at current and voltage ranges other than those specified on the device nameplate may cause charging and discharging problems and deterioration of battery capacity and performance. This is also dangerous and may cause the device to malfunction.
13. When the battery is stored for more than three months, the product needs to be charged to ensure the normal performance of the product.
14. Never do anything that may cause mechanical damage to the device.
15. Do not disassemble or transform the product without authorization.

16. If the device casing is bulged, leaking, or giving off an unpleasant odor, stop using the device immediately.
17. If you notice battery acid leaking from the battery, do not touch it with bare hands. If battery acid contacts the skin or eyes, rinse immediately with plenty of running cold water and soap. Flush eyes for at least 10 minutes. Seek medical advice if necessary.
18. The device features a lithium rechargeable battery that must be disposed of under the applicable laws in your country.
19. Please connect the starting cable correctly according to the manual.
20. Never attempt to jump-start the vehicle in continuous mode! The start cycle should take no more than 3 seconds, and the interval between cycles should be at least 1 minute. Do not exceed 3 consecutive start attempts.
21. After starting the car with the jump starter, the temperature of the jump starter, please do not charge the jump starter at this time, wait at least 8-10 minutes before charging.
22. Only use the jump starter cable supplied with the jump starter.
23. Do not charge the device immediately after jump-starting the vehicle's battery.
24. Never use the device to start the vehicle's battery and charge the device's internal battery simultaneously.




WARNING!





Warning! When pumping, the device heats up, be careful and do not touch the metal parts directly. Do not pump longer than 8 minutes. Let the device cool down for at least 5-10 minutes!

MAIN OVERVIEW

2

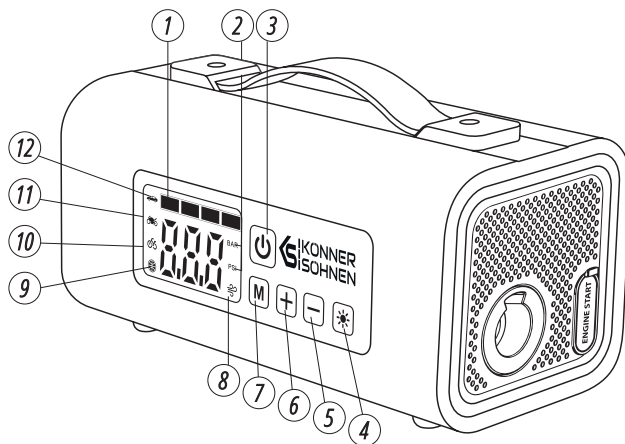


1. Charge level
2. Units
3. Power Button
4. Light Button
5. "-" Button
6. "+" Button
7. Bar/PSI mode selection Button
8. Large-Volume Mode
9. Sport equipment inflation mode
10. Bicycle Mode
11. Motorcycle Mode
12. Car Mode



13. Large-Volume Inflation Port
14. LED Light/SOS
15. High pressure Inflation port
16. Type-C Input
17. USB Output
18. Large-Volume Deflation Port
19. Battery Clamp Port

THE PACKAGE INCLUDES:

- Smart Battery Clamps
- USB Charging Cable
- Storage bag
- Air compressor
- Nozzles for inflating

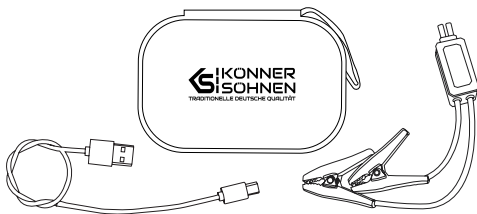

IMPORTANT!



Manufacturer reserves the right to make changes and/or improvements in design, components set and technical attributes without notice and without incurring obligation. The pictures in this manual are schematical and may not match the parameters of original product.

TECHNICAL SPECIFICATION


3

Model	KS JSP-2000
Battery	14800 mAh
Voltage	15V
Rated starting current	800 A
Peak Current	2000 A (up to 8.0 Gasoline and 5.0 Diesel)
Charging time	6 hours
USB Output	5V/2A
Type-C Input	5V/2A
Max pressure	140 Psi
Speed	22 l/min
Max air volume	360 l/min
Gross dimensions (LxWxH)	114×77×205 mm
Gross weight	1.6 kg
Working temperature	(-4 °C) – (+50 °C)

PREPARATION

4

CHARGING OF AIR COMPRESSOR



Connect one end of USB charging cable to the charger, and the other end to the Type-C port of air compressor.


NOTE: Battery indicators show the current battery level (1 bar means under 25% of battery level, 2 bars - 25-50%, 3 bars - 50-75%, 4 bars 75-100%). Battery indicators will illuminate circularly while charging process and when all 4 indicators will be off - it means the charging process is finished.



ATTENTION – DANGER!



Do not overinflate objects! It may lead to serious injury or damage of equipment.

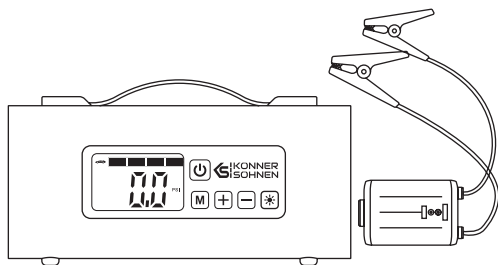


STEP 1 – First insert smart battery clamps into the port of jump starter. If it is inserted completely, red indicator will flash on a jump starter cables. It means air compressor is discharged.

Cause: Low voltage

Solution: Charge it

STEP 2 – Connect the battery clamp to the positive and negative poles of the car battery (Red for the positive terminal and black for the negative terminal).

Indicator of jump starter clamps will flash green - it means charging process has begun.

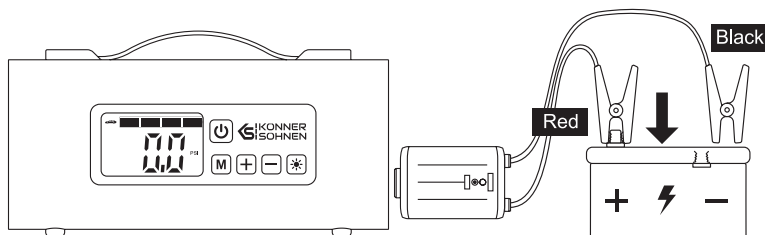

Troubleshooting: If smart battery clamps are illuminated with flashing red - polarities are reverse. Reverse the clamps to correct position.


If red color is constant - the reason is short circuit, check the circuit.

STEP 3 – Start the engine. Do not cycle the jump starter for more than 3 seconds, pause for 1 minute between jump start attempts. This is necessary to let the jump starter battery cool down.

Flashing red light

Cause: Failed to jumpstart in 30s.

Solution: Remove the clamps, try step 1.



STEP 4 – After successful start of the car the plug is withdrawn from the jump starter first, and then the battery clips are removed from the positive and negative terminals.

Tip 1: Turn off any electrical devices in the vehicle before jump starting it.

Tip 2: If the vehicle does not start within 60 seconds of attempting ignition, stop and remove the clamps. Wait for 60 seconds and retry step 3.

AIR COMPRESSOR FUNCTION

1. Power on the air compressor and connect air hose to the inflate port of the compressor.
2. Attach the nozzle you need to air hose.
3. Choose needed mode by pressing "M" button (Car, Moto-bike, bicycle or sport equipment inflation mode).
4. Press and hold the "M" Button to choose Bar/PSI.
5. To shift from Bar to PSI - press and hold "M" button.
6. To start inflation process press the POWER button. When the inflation process is complete, air compressor will stop automatically.

Tip: The maximum pressure of the custom mode is 140 PSI, while the other four modes' values are fixed to avoid damages or safety hazards.

**ATTENTION – DANGER!****Be careful! Air compressor hose is heating up during inflation process. Do not touch it directly while inflating as it may cause burns!**

HOW TO USE LARGE-VOLUME MODE

Turn on the air compressor by holding the Power button for 2 seconds. Connect large-volume hose to large-volume inflation port and attach needed nozzle out of available. Press “M” to choose large-volume mode.

Press Power button to start inflation process. When inflation is completed, remove large-volume hose.

Attach the hose to the suction hole for deflation, in such way you can deflate mattresses, boats and other large inflatable products.

**NOTE****Don't let to operate the air compressor for more then 10 minutes of continuous work. Let the air compressor to cool down for at least 10 min.****You can adjust the time of inflation by 30 sec. The default inflation time is 300 seconds.**

HOW TO USE POWER BANK FUNCTION

Connect USB charging cable into USB port of air compressor and connect the other end of the cable to device you need to charge.

LIGHTENING FUNCTION

Press the Light button to turn on the LED light of air compressor. Press Light button again to choose the mode you need(-flashlight mode, strobe mode or SOS). Press the button again to turn off the lightening.

**NOTE****When the battery is stored for more than three months, the product needs to be charged to ensure the normal performance of the product.**

ERRORS DESCRIPTION

6

# Error	Error	Solution
E1	Battery overheating.	Let it cool down.
E2	Low battery temperature, can't charge it.	Use at the recommended temperature.
E3	Engine overheating.	Let it cool down.
E4	At more than 10 minutes of continuous operation protection function is activated.	Let it cool down for 10 min and restart again if needed.
E5	Insufficient battery level.	Charge it.

WARRANTY SERVICE TERMS

7

Könnér & Söhnen warrants the original purchaser of jump starters, chargers, compressors, vacuum cleaners, etc to 1 year limited warranty including batteries for these products. If warranty is longer than 1 year according to local legislation, contact your local seller for grating warranty.

Warranty starts from the date of retail purchase by the end-user.

Make sure to keep your receipt during the whole warranty period. This product is not intended for commercial use.



EC Declaration of Conformity

Nr. 160

The following products have been tested by us with the listed standards and found in compliance with the European Community Electromagnetic compatibility Directive (EMC) 2014/30/EC.

Manufacturer: DIMAX INTERNATIONAL GmbH
Address: Flinger Broich 203, 40235 Duesseldorf, Germany
Product: Jump starter with air compressor "Könner & Söhnen"
Type / Model: KS JSP-2000
Product: Air compressor "Könner & Söhnen"
Type / Model: KS P10, KS P20, KS P30

The statement is based on a single evaluation of above mentioned products. It does not imply an assessment of the whole production and does not permit the use of the test lab. logo. The manufacturer should ensure that all product in series production are in conformity with the product sample detailed in this report. The applicant should hold the whole technical report at disposal of the competent all the right.

Applied EC Directives: 2014/30/EU Electromagnetic compatibility Directive (EMC)
EU RoHS 11/65/EU Annex II amending Annex 2015/863/EU
and amending Annex (EU) 2017/2102

Applied Standards: EN IEC 55014-1:2021, EN IEC 55014-2:2021
EN IEC 61000-3-2:2019/A1:2021, EN 61000-3-3:2013/A2:2021
EN 61000-4-2:2009, EN IEC 61000-4-3:2020,
EN 61000-4-4:2012, EN 61000-4-5:2014+A1:2017,
EN 61000-4-6:2014, EN 61000-4-8^2010,
EN IEC 61000-4-11:2020
IEC 62321-5:2013&IEC 62321-4:2013+A1:2017&
IEC 62321-7-2:2017 & IEC 62321-6:2015 & IEC 62321-8: 2017
& IEC 62321-3-1:2013 & IEC 62321 -7-1:2015



23

Issued Date: 2023-08-10
Place of issue: Duesseldorf
General director: Fomin P.

DIMAX
International GmbH
Flinger Broich 203 40235 Düsseldorf
USt-ID DE296177274
koenner-soehnen.com

P. Fomin

We DIMAX INTERNATIONAL GmbH hereby declare that specified above conforms covering European Parliament and Council Directives, Electromagnetic compatibility Directive (EMC) 2014/30/EC of 26 February 2014. The CE mark above can be used under the responsibility of manufacturer. After completion of an EC declaration of Conformity and compliance with all relevant EC directives.

CONTACTS

Deutschland:

Hergestellt unter Lizenz und Kontrolle der DIMAX International GmbH.
Importeur und Vertreter in Deutschland: DIMAX International GmbH,
Flinger Broich 203, 40235 Düsseldorf, Deutschland. Produziert in VRC.
amazon@dimaxgroup.com

www.konner-sohnen.com

The United States:

KS Energy Solutions, Inc. Balcones Drive STE 100 Austin, TX 78731, USA

Authorized Warranty Service

support.us@dimaxgroup.com

www.konner-sohnen.us

The United Kingdom:

Innovation Trade Ltd., 5th Floor, 167-169 Great Portland Street,
London, W1W 5PF, sales.uk@dimaxgroup.com

Technical support

support.uk@dimaxgroup.de

www.konner-sohnen.uk

European Union:

Manufactured under license and control of DIMAX International
GmbH, Flinger Broich 203, 40235 Duesseldorf, Germany.

Importer and representative in Netherlands DIMAX International
Poland Ltd, Południowa 8 st, 05-830 Stara Wieś, Poland. Assembled in PRC.
amazon@dimaxgroup.com

www.konner-sohnen.com

France:

Fabriqu  sous licence et contr le de DIMAX International GmbH,
Flinger Broich 203, 40235 D sseldorf, Allemagne.

Importateur et repr sentant en France et en Belgique

DIMAX International Poland Ltd, Po udniowa 8 st,

05-830 Stara Wie , Pologne. Assembl  en RPC.

amazon@dimaxgroup.com

www.konner-sohnen.fr

Esp a a:

Fabricado bajo licencia y control de DIMAX International GmbH,
Flinger Broich 203, 40235 D sseldorf, Alemania.

Importador y representante en Espa a de DIMAX International Poland Ltd,

Po udniowa 8 st, 05-830 Stara Wie , Polonia.

Ensamblado en la Rep blica Popular China.

amazon@dimaxgroup.com

www.konner-sohnen.es

Polska:

Wyprodukowano na licencji i pod kontrol  DIMAX International GmbH,
Flinger Broich 203, 40235 Duesseldorf, Niemcy.

Importer i przedstawiciel w Polsce: DIMAX International Poland Sp.z o. o.
ul. Po udniowa 8, 05-830 Stara Wie , Polska. Zmontowany w CRL.

amazon@dimaxgroup.com

www.konner-sohnen.pl

  kra ina:

Виготовлено за л ценз єю та п д контролем DIMAX International GmbH,
Flinger Broich 203, 40235 Д ссельдорф, Н меччина.

 мпорт р та представник в   кра ин : ТОВ "ТЕХНО ТРЕЙД КС"

вул. Електрот хн чна 47, 02225, м. Київ,   кра ина. Змонтовано в КНР

www.konner-sohnen.com.ua

